


TECHNICAL DATA SHEET

KIMOTO

Prosave RC 25 THS

1. Structure

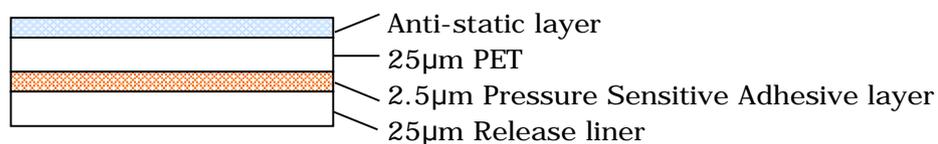

2. Recommended applications

- ◆ Heat resistant adhesive layer, for optimum protection and reinforcement in processes involving heat.
- ◆ Low adhesive residue after heating for easy peeling.

3. Properties

Properties

Item	Method	Adherend	Initial	After heating*2
Peel Strength [N/25mm]	*1	PET	0.07	0.10
		SUS	0.04	0.09
		Glass	0.06	0.11
Surface Resistivity [/]	-	-	2.8×10^9	-

*1 peeling speed 300mm/min, peeling angle 180 degree

*2 150 30min.

The test data represented in this document is for reference only and should be regarded as a guideline for use.