


TECHNICAL DATA SHEET

KIMOTO

Prosave SQ 50 SQ

1. Structure

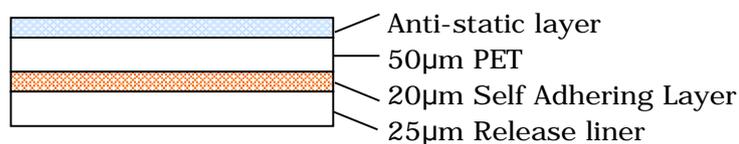

2. Recommended applications

- ◆ The adhesive layer is self-adhering, easy to put on.
- ◆ A silicone-based adhesive with outstanding resistance to chemicals.
- ◆ High Tt, making it the ideal protective film for optical products.

3. Properties

Properties

Item	Unit	Method	Adherend	Result
Initial Peel Strength	[N/25mm]	* 1	PET	-
			SUS	0.01
			Glass	0.01
			Acrylic	0.02
Surface Resistivity	/		-	1.0×10^{10}
Total Light Transmittance	%	JIS K 7361-1	-	93.70
HAZE	%	JIS K 7136	-	0.53

*1 peeling speed 300mm/min,peeling angle 180 degree

The test data represented in this document is for reference only and should be regarded as a guideline for use.