


TECHNICAL DATA SHEET

KIMOTO

Prosave CB 25 CBFS2

1. Structure

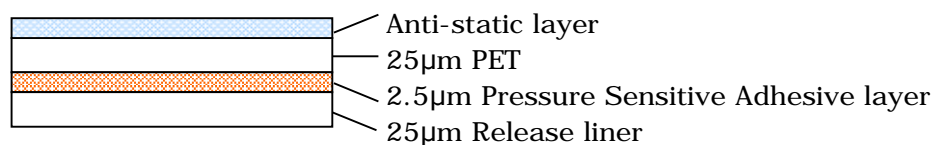

2. Recommended applications

- ◆ Adhesive layer design ideal for protecting substrates.
- ◆ Provides full protection in all kinds of processes.
- ◆ Easily peeled off leaving very low adhesive residue.
- ◆ In laser drilling, facilitates clean through-holes without surface burring.
- ◆ The ideal carrier film for conductive paste embedding.

3. Properties

Properties

Item	Unit	Method	Adherend	Result
Initial Peel Strength	[N/25mm]	*1	PET	0.13
			SUS	0.11
			Glass	0.15
Surface Resistivity	/		-	2.0×10^9

*1 peeling speed 300mm/min,peeling angle 180 degree

The test data represented in this document is for reference only and should be regarded as a guideline for use.