


# TECHNICAL DATA SHEET

# KIMOTO

## Prosave EP 25 LS

### 1. Structure

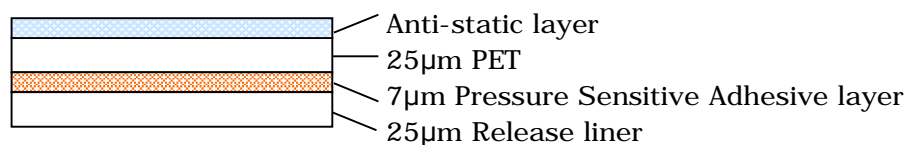

### 2. Recommended applications

- ◆ Easily peeled off leaving very low adhesive residue.
- ◆ Maintains constant peel strength over extended time.
- ◆ Anti-static substrate surface.

### 3. Properties

#### Properties

Item	Unit	Method	Adherend	Result
Initial Peel Strength	[N/25mm]	* 1	PET	0.11
			SUS	0.06
			Glass	0.08
			Acrylic	0.13
Surface Resistivity	/		-	$9.5 \times 10^9$

\*1 peeling speed 300mm/min,peeling angle 180 degree

The test data represented in this document is for reference only and should be regarded as a guideline for use.