


TECHNICAL DATA SHEET

KIMOTO

Prosave EP 50 LS

1. Structure

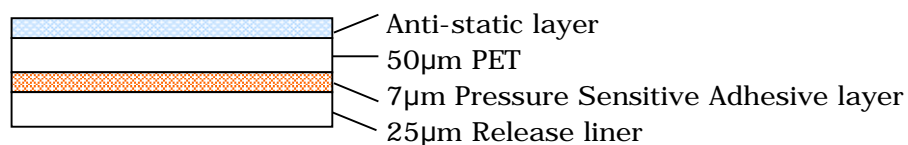

2. Recommended applications

- ◆ Easily peeled off leaving very low adhesive residue.
- ◆ Maintains constant peel strength over extended time.
- ◆ Anti-static substrate surface.

3. Properties

Properties				
Item	Unit	Method	Adherend	Result
Initial Peel Strength	[N/25mm]	* 1	PET	0.06
			SUS	0.01
			Glass	0.05
			Acrylic	0.06
Surface Resistivity	/		-	9.5×10^9

*1 peeling speed 300mm/min,peeling angle 180 degree

The test data represented in this document is for reference only and should be regarded as a guideline for use.