


Savefine Film Anti-Glare AG3PSA

PRODUCT DESCRIPTION

- Self-wet property for removable applications
- No residue on adherend
- Consistent gloss and Antiglare surface
- Excellent scratch resistance
- Chemical and household cleaner resistance

STRUCTURE

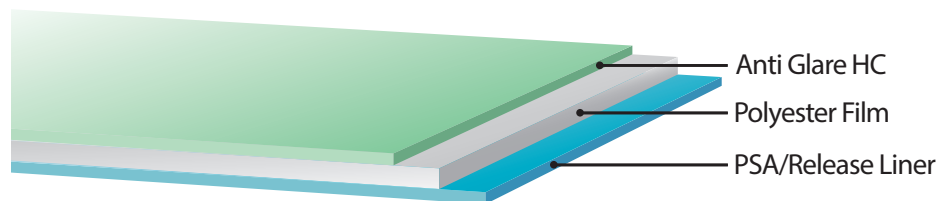

OPTICAL PROPERTIES

PROPERTY	TEST METHOD	U/M	ANTI-GLARE AG3PSA
Transmittance	ASTM D1003	%	≥ 90
Haze	ASTM D1003	%	3.0 - 4.5
60° Gloss	ASTM D523	%	90 - 105
Pencil Hardness	ASTM D3363		≥ 2H

PHYSICAL PROPERTY

PEEL STRENGTH ON DIFFERENT MATERIALS						
Adherend	SUS	Glass	Acryl	PVC	PC	ABS
Peel strength (oz/inch) (24 hrs. Dwell)	0.18	0.16	0.19	0.14	0.14	0.19

DURABILITY TEST				
	Adherend	Initial	250 hrs.	500 hrs.
Peel strength (oz/inch) (60°C, 90%RH)	SUS	0.18	0.30	0.40
	Glass	0.16	0.35	0.42

HEAT RESISTANCE TEST				
	Adherend	Initial	250 hrs.	500 hrs.
Peel strength (oz/inch) (80°C)	SUS	0.18	0.38	0.45
	Glass	0.16	0.41	0.47

* No residue on all adherend after peel strength measurement.