


TECHNICAL DATA SHEET

Confidential

KIMOTO

Mat Lumirror 100

1. Structure

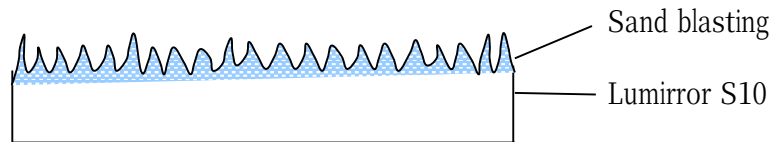

2. Recommended applications

- ◆ High adhesion
- ◆ Antiblocking
- ◆ Transfer molding
- ◆ Matte
- ◆ Releasability

3. Properties

● Properties

Item	Unit	Method	Result
Ra (※2)	μ m	JIS B 0601	0.71
Rmax	μ m	JIS B 0601	7.13
Rz	μ m	JIS B 0601	5.72
Gloss 60 ° (※2)	%	JIS Z 8741	5.1
Total Light Transmittance	%	JIS K 7361-1	84.4
HAZE	%	JIS K 7136	88.8
Heat shrinkage (※1)	%	150°C 30min	MD 1.0 TD 0.2
Total Thickness	μ m	—	100

MD : Machine Direction TD : Transverse Direction

(※1) Heat shrinkage : Positive number → Shrinkage , Negative number → Expansion

(※2) Controlled Items

The test data represented in this document is for reference only and should be regarded as a guideline for use.

KIMOTO

<http://www.kimoto.co.jp/> (JAPAN)
<http://www.kimototech.com/> (U.S.A.)
<http://www.kimoto.ch/> (SWITZERLAND)
<http://www.kimoto.com.cn/> (CHINA)