


TECHNICAL DATA SHEET

Confidential

KIMOTO

Mat Lumirror 100 B

1. Structure

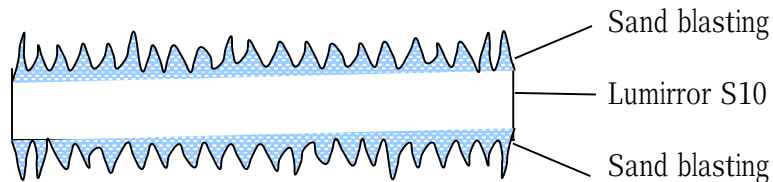

2. Recommended applications

- ◆ High adhesion
- ◆ Antiblocking
- ◆ Transfer molding
- ◆ Matte
- ◆ Releasability

3. Properties

● Properties (Both sides are same. This test data was measured any one side.)

Item	Unit	Method	Result
Ra (※2)	μ m	JIS B 0601	0.71
Rmax	μ m	JIS B 0601	7.13
Rz	μ m	JIS B 0601	5.72
Gloss 60 ° (※2)	%	JIS Z 8741	5.0
Total Light Transmittance	%	JIS K 7361-1	81.7
HAZE	%	JIS K 7136	95.3
Heat shrinkage (※1)	%	150°C 30min	MD 0.9 TD 0.3
Total Thickness	μ m	—	103

MD : Machine Direction TD : Transverse Direction

(※1) Heat shrinkage : Positive number → Shrinkage , Negative number → Expansion

(※2) Controlled Items

The test data represented in this document is for reference only and should be regarded as a guideline for use.

KIMOTO

<http://www.kimoto.co.jp/> (JAPAN)
<http://www.kimototech.com/> (U.S.A.)
<http://www.kimoto.ch/> (SWITZERLAND)
<http://www.kimoto.com.cn/> (CHINA)