


TECHNICAL DATA SHEET

Confidential

KIMOTO

Mat Lumirror 75

1. Structure

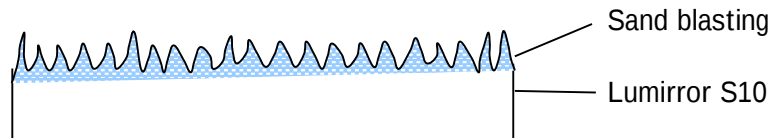

2. Recommended applications

- ◆ High adhesion
- ◆ Antiblocking
- ◆ Transfer molding
- ◆ Matte
- ◆ Releasability

3. Properties

● Properties

Item	Unit	Method	Result
Ra(2)	μ m	JIS B 0601	0.64
Rmax	μ m	JIS B 0601	7.60
Rz	μ m	JIS B 0601	5.59
Gloss 60 ° (2)	%	JIS Z 8741	6.4
Total Light Transmittance	%	JIS K 7361-1	85.6
HAZE	%	JIS K 7136	85.8
Heat shrinkage(1)	%	150 30min	MD 0.8 TD 0.2
Total Thickness	μ m	—	77

MD : Machine Direction TD : Transverse Direction

(1) Heat shrinkage : Positive number → Shrinkage , Negative number → Expansion

(2) Controlled Items

The test data represented in this document is for reference only and should be regarded as a guideline for use.

KIMOTO

<http://www.kimoto.co.jp/> (JAPAN)
<http://www.kimototech.com/> (U.S.A.)
<http://www.kimoto.ch/> (SWITZERLAND)
<http://www.kimoto.com.cn/> (CHINA)