


Flexiber Film AG60CWA

PRODUCT FEATURES

- Excellent scratch resistance
- Consistent gloss/antiglare surface
- Chemical and household cleaner resistance
- Excellent printable surface
- Dimensionally Stable

STRUCTURE

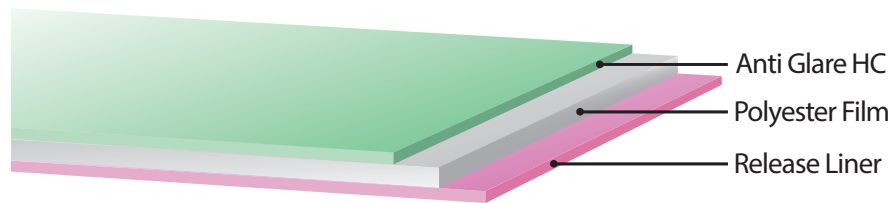

OPTICAL AND PHYSICAL PROPERTIES

PROPERTY	TEST METHOD	U/M	AG60CWA
Total Light Transmittance	ASTM D1003	%	≥ 90
Haze	ASTM D1003	%	53 ± 5
Haze after screen ink	ASTM D1003	%	≤ 15
Clarity after screen ink	ASTM D1003	%	≥ 90
Pencil hardness	ASTM D3363	–	≥ 2H
Tape adhesion	ASTM D3002	100/100	Pass
Heat Shrinkage	120°C 30min	TD	TD: ≤ 0.1
		MD	MD: < 0.2

* Technical data is based on sample measurement at KTI.

* Ink tested: SERICOL UVIBOND UV383.